

# POWERED MICRO SPOT

**COMPACT VOCAL MONITOR**

**MSPA5**

## THE ORIGINAL PERSONAL MONITOR

### HOT SPOT SERIES MONITORS

The Powered Micro Spot® model MSPA5, incorporates design features of its big & little brother, the Powered Hot Spot® Powered Nano Spot™, maintaining a similar compact design.

The Micro Spot® Series is designed to be used in a wide array of applications: churches, schools, courtrooms, fixed installations, or on stage. The MSPA5 is powered by an internal 100 watt amplifier, delivering quality sound through the specially designed 5" full range speaker. This provides superior vocal clarity. The Powered Micro Spot® will accept mic or line level with its XLR (+48V phantom power), 1/4", or 1/8" input.

Volume and EQ controls are conveniently located on the front of the Powered Micro Spot®. Additionally, there is an indicator for the built-in compressor/limiter, which helps prevent overdriving of the speaker and distortion.

The Powered Micro Spot® can be mounted to a mic stand or be wall/ceiling mounted with the included hardware.



- Internal 100 Watt Amp
- 5" Ceramic Driver
- Freq. Response 160Hz - 20kHz
- Sensitivity: 88dB, 1 W @ 1 m
- 108dB Max SPL
- 16 Ohms
- Input Connections: Mic Line, XLR, 1/4" & 1/8" Summing
- High Impact ABS Plastic
- 20dB Pad
- 2 Band EQ
- Built in Compressor
- +48V Phantom Power
- Stand/Wall Mount Bracket Included
- Weighs less than 5 lbs



AMPLIFY YOUR PASSION™



# POWERED MICRO SPOT<sup>®</sup>

## COMPACT VOCAL MONITOR

MSPA5

### Specifications

**Frequency Response:** 160Hz - 20kHz

**Output:** 100W @ 16 Ohms

**Sensitivity:** 88dB, 1 W @ 1 m

**Max SPL:** 108dB

**Speaker Complement:** 5" Ceramic Driver

**Nominal Impedance:** 16 Ohms

**Equalization:** Two Band Center Detent:

Lo: +/- 12dB @ 200Hz

Hi: +/- 12dB @ 10kHz

**Input Connection:** One Balanced 1/4", One Balanced XLR with +48 VDC

Phantom Power, and One 1/8" Stereo Summing

**Controls:** Input Level, High Frequency, Low Frequency, 20dB Pad,

Phantom Power

**Indicators:** Power LED, Compressor LED

**Power Requirements:** Internal Power Supply, 120-230 VAC~ 1.5A, 50/60Hz

\***Splowt:** 25.11

**Enclosure Materials:** High Impact ABS Plastic


**Mounting/Rigging:** Built-in yoke bracket points

**Color:** Black

**Accessories:** Wall/Stand Mount Bracket, IEC Power Cable, Rubber Feet, Quick Start Guide

**Dimensions:** 6.26" x 6" x 7.52" (159 x 152 x 191 mm)(HxWxD)

**Weight:** 4.3 lbs (1.95kg)

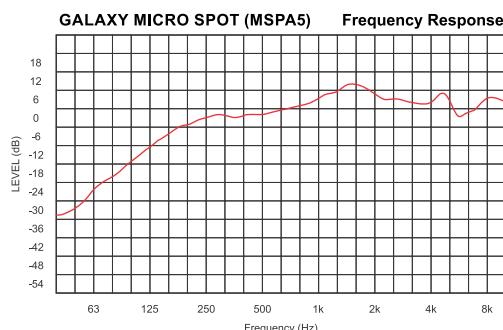

Included accessories and hardware

\***Splowt** A unit of measure, expressed as dB, that divides a speaker's maximum SPL by its weight in pounds. Galaxy Audio's NANO SPOT boasts a splowt of 58 dB (highest in the known universe).



Specifications subject to change without notice.

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 [www.galaxyaudio.com](http://www.galaxyaudio.com)

V20250715

AMPLIFY YOUR PASSION.<sup>™</sup>